


HOLLOW CORE SLAB 15 CM.

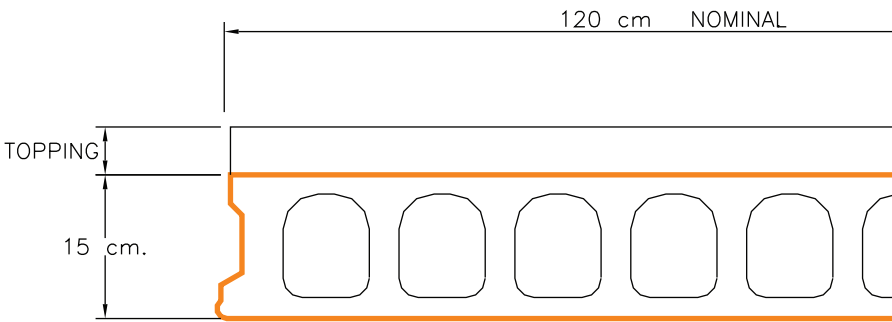

			SAFE SUPERIMPOSED SERVICE LOADS (KGS/SQ.M)											
TOPPING	No. of STRAND	Ø Mn (kg-m.)	SIMPLE SPAN IN METER											
			3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5
0 cm.	4-Ø 3/8"	4,140.25	1,650	1,172	861	648	496	383	297	231	178			
	5-Ø 3/8"	5,075.02	2,058	1,471	1,090	829	642	504	399	317	252	200	157	
	6-Ø 3/8"	5,972.05	2,449	1,758	1,310	1,003	783	621	497	401	324	263	212	170
	7-Ø 3/8"	6,832.50	2,823	2,034	1,521	1,169	918	732	591	481	393	323	265	217
	8-Ø 3/8"	7,657.50	3,183	2,298	1,723	1,329	1,048	839	680	557	459	380	316	262
	9-Ø 3/8"	8,448.16	3,527	2,551	1,917	1,482	1,172	942	767	630	522	435	364	305
5 cm.	4-Ø 3/8"	5,784.89	2,255	1,586	1,156	859	646	487	369	265	161			
	5-Ø 3/8"	7,066.58	2,818	2,001	1,470	1,107	847	655	508	386	266	168		
	6-Ø 3/8"	8,287.08	3,349	2,391	1,770	1,343	1,038	813	641	508	370	259	169	
	7-Ø 3/8"	9,448.60	3,855	2,763	2,054	1,568	1,221	963	768	615	475	351	249	
	8-Ø 3/8"	10,553.30	4,337	3,117	2,325	1,782	1,394	1,107	888	718	580	442	329	236
	9-Ø 3/8"	11,603.30	4,794	3,453	2,582	1,986	1,559	1,243	1,002	815	667	533	409	307